SELECTRIC

5M

Slim Design Decorative Wiring Accessories with Metal Rockers

Satin Chrome with Metal Rockers and White Insert
Satin Chrome with Metal Rockers and Black Insert
Polished Chrome with Metal Rockers and White Insert
Polished Chrome with Metal Rockers and Black Insert
Black Nickel with Metal Rockers and Black Insert
Antique Brass with Metal Rockers and Black Insert
Polished Brass with Metal Rockers and Black Insert
Satin Brass with Metal Rockers and Black Insert

- 10 amp Plate Switches
- Dimmers Push n / ff & No De- ating
- 20 amp DP Switches
- 45 amp DP Switches
- 13 amp Socket utlets
- ound Pin Socket utlets
- Fused Connection Units
- 45 amp Cooker Units
- Shaver Suppl8 Unit
- TV/FM & Satellite Sockets
- Communication / Data Sockets
- Blanking Plates

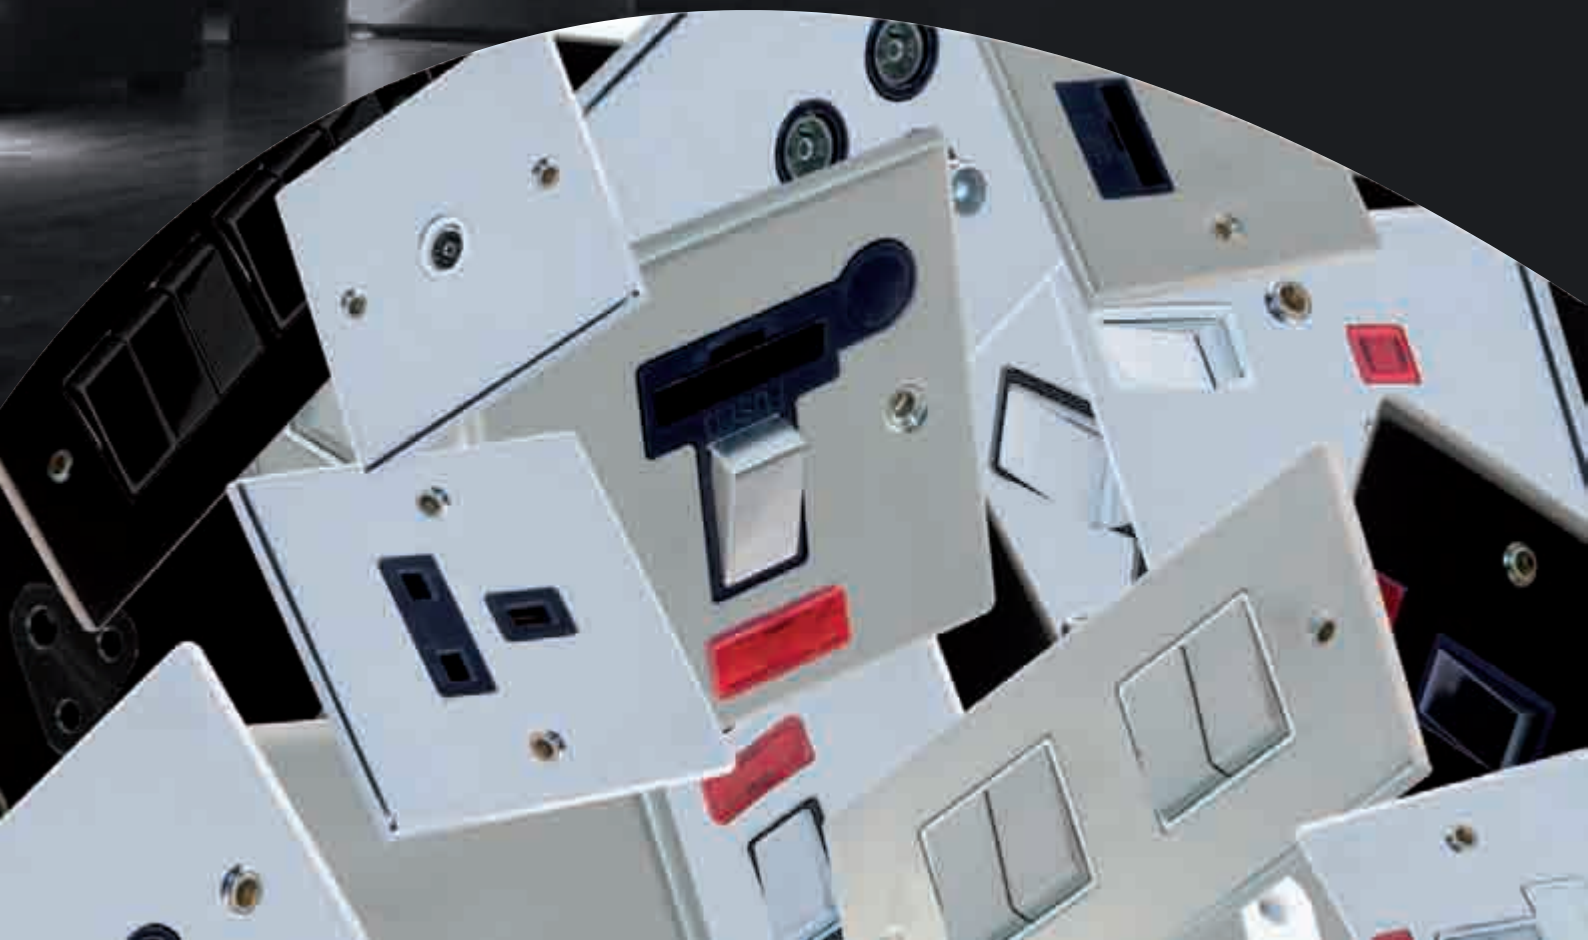

Introduction

The new range of SELECTRIC 5M was designed with style, durability and ease of installation in mind.

We chose a sleek and flush looking 5mm depth plate for our range of SELECTRIC 5M accessories because of some of the problems associated with the flat plate accessories due to retro-fit steel boxes and uneven plaster boards which makes the installation of this range occasionally problematic.

Coming in 8 popular plate finishes all with metal rockers you can be sure to add a touch of luxury and quality to any room!

Contents	Page
Satin Chrome with Metal Rockers and White Inserts	72-77
Satin Chrome with Metal Rockers and Black Inserts	78-83
Polished Chrome with Metal Rockers and White Inserts	84-89
Polished Chrome with Metal Rockers and Black Inserts	90-95
Black Nickel with Metal Rockers and Black Inserts	96-101
Antique Brass with Metal Rockers and Black Inserts	102-107
Polished Brass with Metal Rockers and Black Inserts	108-113
Satin Brass with Metal Rockers and Black Inserts	114-119

All our Dimmers use No De-Rating Modules

- Suitable for control of quality dimmable electronic transformers, toroidal transformers and tungsten lamps WITHOUT de-rating
- For use with resistive and inductive loads
- Integrated over-temperature protection fuse
- Smooth dimming operation from 0-100% light output
- Fits a plaster mounting box (25mm)
- 3 Year guarantee
- All dimmers conform to EN55015, EN61000 & EN60669 various

Features & Benefits

- All 10 amp switch modules are interchangeable with any plate product within the whole of the SELECTRIC range

- All sockets come with 2 or more earth terminals to comply with the latest IEE wiring regulations



- Metal rockers for truly stunning effects

- Slim 5mm depth plate which gives the appearance of the plate being flush on the wall but without the problem of retro fit steel boxes with the flat plate range

- 5 Year no quibble manufacturer's guarantee

- Attractive point of sale clear display case packaging

Technical Information

Specifications & Features
Dimensions
86x86mm (1 gang)
86x146mm (2 gang)
Supplied with M3.5 fixing screws

10 Amp Plate Switches
- Compliant with BSEN60669-1
- 3 Pole fan isolator compliant with BSEN60947-3-1992
- CE Marked
- X-rated for fluorescent or inductive loads

No De-Rating Dimmers
- See above

20 Amp DP Switches
- Compliant with BS3676
- CE Marked
- Cable clamp located on inside of plate capable of accepting 2.5mm flex

45 Amp DP Switches
- Compliant with BS3676
- CE Marked

13 Amp Socket Outlets
- Compliant with BS1363
- 2 earth terminals for safe installation

Round Pin Socket Outlets
- Compliant with BS546

Fused Connection Units
- Compliant with BS1363
- CE Marked

45 Amp Cooker Units
- Compliant with BS4177

Shaver Supply Unit
- Compliant with BS3535

TV/FM & Satellite Sockets
- Compliant with BS3041 where applicable
- Suitable for use with VHF/UHF TV & VHF signals

Communication / Data Sockets
- Compliant with BABT & BSEN41003 where applicable

Blanking Plates
- Compliant with BS5733

Slim Design Decorative Wiring Accessories with Metal Rockers

5 Year Plate Guarantee

DSL105

DSL106

DSL108

Code No.	Description
DSL101	1 gang 2 way - X-Rated
DSL102	2 gang 2 way - X-Rated
DSL103	3 gang 2 way - X-Rated
DSL104	4 gang 2 way - X-Rated
DSL105	6 gang 2 way - X-Rated
DSL106	Push switch "press" - X-Rated
DSL107	1 gang intermediate - X-Rated
DSL108	3 pole fan isolator - X-Rated

10 amp Plate Switches

DSL103

3 gang 2 way

Features:

- Compliant with BS3676, BSEN60669
- CE Marked
- Each terminal capable of accepting 3x1.5mm
- X-rated for fluorescent or inductive loads

All 10 amp switch modules are interchangeable with any plate product within the range

DSL109

DSL110

DSL114

Code No.	Description
DSL109	1 gang 2 way 400 watt
DSL112	1 gang 2 way 1000 watt
DSL110	2 gang 2 way 400 watt
DSL111	3 gang 2 way 400 watt
DSL114	4 gang 2 way 400 watt

Dimmers Push On / Off- No Derating

DSL111

3 gang 2 way 400 watt

Features:

- Suitable for control of quality dimmable electronic transformers, toroidal transformers and tungsten lamps WITHOUT de-rating
- For use with resistive and inductive loads
- Integrated over-temperature protection fuse
- Smooth dimming operation from 0-100% light output
- Compliant with BSEN60669-2-1 various
- CE Marked
- Fits a plaster depth (25mm) mounting box
- 3 Year Guarantee

call to order +44 (0)161 745 7777 fax to order +44 (0)161 745 2777 email: sales@selectricuk.co.uk.com website: www.selectricuk.co.uk.com

20 Amp DP Switches

DSL116
20 amp DP switch with neon

Features:

- Compliant with BS3676, BSEN60669
- CE Marked
- Terminals capable of accepting 3x2.5mm, 4x2.5mm (Earth)
- Optional cable outlet located at bottom edge of faceplate as a knockout
- Cable clamp located on inside of plate capable of accepting 2.5mm flex

DSL115

Code No.	Description
DSL115	20 amp DP switch
DSL116	20 amp DP switch with neon

45 Amp DP Switches

DSL118
2 gang plate with neon

Features:

- Compliant with BS3676, BSEN60669
- CE Marked

DSL117

Code No.	Description
DSL117	1 gang plate with neon
DSL118	2 gang plate with neon

Slim Design Decorative Wiring Accessories with Metal Rockers

5 Year Plate Guarantee

DSL119

DSL123

DSL124

Code No.	Description
DSL119	1 gang unswitched
DSL120	2 gang unswitched + 2 earth terminals
DSL121	1 gang switched DP
DSL122	2 gang switched DP+ 2 earth terminals
DSL123	1 gang switched DP with neon
DSL124	2 gang switched DP with neon+ 2 earth terminals

13 Amp Socket Outlets

DSL122
2 gang switched DP
+2 earth Terminals

Features:
- Compliant with BS1363
- Terminals capable of accepting up to 4x2.5mm conductors
- 2 earth terminals for easy installation



DSL126

Code No.	Description
DSL125	2 amp 3 pin
DSL126	5 amp 3 pin

Round Pin Sockets Outlets -with shutters

DSL125
2 amp 3 pin

Features:
- Compliant with BS546

call to order +44 (0)161 745 7777 fax to order +44 (0)161 745 2777 email: sales@selectricuk.co.uk.com website: www.selectricuk.co.uk.com

Fused Connection Units

DSL129
13 amp DP switched with neon

Features:

- Compliant with BS1363 Part 4
- CE Marked
- Terminals capable of accepting 3x2.5mm, 4x2.5mm (Earth) conductors
- Optional cable outlet located at bottom edge of faceplate as a knockout
- Cable clamp located on inside of plate capable of accepting 2.5mm flex



DSL127

DSL128

DSL130

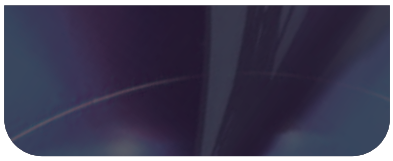

Code No.	Description
DSL127	13 amp unswitched
DSL128	13 amp DP switched
DSL129	13 amp DP switched with neon
DSL130	13 amp DP switched with neon with flex outlet on front plate

45 Amp Cooker Units

DSL131
13 amp switched socket with neons

Features:

- Compliant with BS4177
- Terminals cap able of accepting up to 2x10mm, 1x10mm each conductor

Code No.	Description
DSL131	with 13 amp switched socket with neons

Code No.	Description
DSL132	Dual Voltage- 220/240v 50Hz input -230/115v output

Shaver Supply Unit

DSL132
Dual Voltage- 220/240v 50Hz input -230/115v output

Features:
- Compliant with BS5733
- CE Marked
- Terminals capable of accepting 3x2.5mm conductors for 20/25 amp
- Cable clamp located on inside of 45 amp plate capable of accepting 4mm to 16mm cable

TV/FM & Satellite Sockets

DSL133

DSL135

DSL136

DSL137
3 gang satellite (1x satellite, 2x TV/FM)

Features:
- Compliant with BS3041 where applicable
- Isolated versions suitable for use with multi-outlet aerial commercial systems
- Suitable for use with VHF/UHF TV &VHF signals

Code No.	Description
DSL133	1 gang TV
DSL134	2 gang TV/FM
DSL135	1 gang satellite
DSL145	2 gang satellite
DSL136	2 gang satellite (1x satellite, 1 x TV/FM)
DSL137	3 gang satellite (1x satellite, 2 x TV/FM)

call to order +44 (0)161 745 7777 fax to order +44 (0)161 745 2777 email: sales@selectricuk.co.uk.com website: www.selectricuk.co.uk.com

Communication / Data Sockets

DSL141
2 gang RJ45 (computer/data)

Features:
• Compliant with BABT & BSEN41003 where applicable

DSL138

DSL140

DSL144

Code No.	Description
DSL138	1 gang master telephone socket
DSL139	1 gang secondary telephone socket
DSL140	1 gang RJ45 (computer / data)
DSL141	2 gang RJ45 (computer / data)
DSL144	1 gang RJ11 (american)

Blanking Plates

DSL143
2 gang

Features:
• Compliant with BS5733

DSL142

Code No.	Description
DSL142	1 gang
DSL143	2 gang


DSL205

DSL206

DSL208

Code No.	Description
DSL201	1 gang 2 way - X-Rated
DSL202	2 gang 2 way - X-Rated
DSL203	3 gang 2 way - X-Rated
DSL204	4 gang 2 way - X-Rated
DSL205	6 gang 2 way - X-Rated
DSL206	Push switch "press" - X-Rated
DSL207	1 gang intermediate - X-Rated
DSL208	3 pole fan isolator - X-Rated

10 amp Plate Switches

DSL203
3 gang 2 way

Features:
- Compliant with BS3676, BSEN60669
- CE Marked
- Each terminal capable of accepting 3x1.5mm
- X-rated for fluorescent or inductive loads

All 10 amp switch modules are interchangeable with any plate product within the range

DSL109

DSL110

DSL114

Code No.	Description
DSL109	1 gang 2 way 400 watt
DSL112	1 gang 2 way 1000 watt
DSL110	2 gang 2 way 400 watt
DSL111	3 gang 2 way 400 watt
DSL114	4 gang 2 way 400 watt

Dimmers Push On / Off- No Derating

DSL111
3 gang 2 way 400 watt

Features:
- Suitable for control of quality dimmable electronic transformers, toroidal transformers and tungsten lamps WITHOUT de-rating
- For use with resistive and inductive loads
- Integrated over-temperature protection fuse
- Smooth dimming operation from 0-100% light output
- Compliant with BSEN60669-2-1 various
- CE Marked
- Fits a plaster depth (25mm) mounting box
- 3 Year Guarantee

20 Amp DP Switches

DSL216
20 amp DP switch with neon

Features:

- Compliant with BS3676, BSEN60669
- CE Marked
- Terminals capable of accepting 3x2.5mm, 4x2.5mm (Earth)
- Optional cable outlet located at bottom edge of faceplate as a knockout
- Cable clamp located on inside of plate capable of accepting 2.5mm flex

DSL215

Code No.	Description
DSL215	20 amp DP switch
DSL216	20 amp DP switch with neon

45 Amp DP Switches

DSL218
2 gang plate with neon

Features:

- Compliant with BS3676, BSEN60669
- CE Marked

DSL217

Code No.	Description
DSL217	1 gang plate with neon
DSL218	2 gang plate with neon

DSL219

DSL223

DSL224



Code No.	Description
DSL219	1 gang unswitched
DSL220	2 gang unswitched + 2 earth terminals
DSL221	1 gang switched DP
DSL222	2 gang switched DP+ 2 earth terminals
DSL223	1 gang switched DP with neon
DSL224	2 gang switched DP with neon+ 2 earth terminals

13 Amp Socket Outlets

DSL222
2 gang switched DP
+2 earth Terminals

Features:
- Compliant with BS1363
- Terminals capable of accepting up to 4x2.5mm conductors
- 2 earth terminals for easy installation

DSL226

Code No.	Description
DSL225	2 amp 3 pin
DSL226	5 amp 3 pin

Round Pin Sockets Outlets -with shutters

DSL225
2 amp 3 pin

Features:
- Compliant with BS546

call to order +44 (0)161 745 7777 fax to order +44 (0)161 745 2777 email: sales@selectricuk.co.uk.com website: www.selectricuk.co.uk.com

Fused Connection Units

DSL229
13 amp DP switched with neon

Features:

- Compliant with BS1363 Part 4
- CE Marked
- Terminals capable of accepting 3x2.5mm, 4x2.5mm (Earth) conductors
- Optional cable outlet located at bottom edge of faceplate as a knockout
- Cable clamp located on inside of plate capable of accepting 2.5mm flex

DSL227

DSL228

DSL230

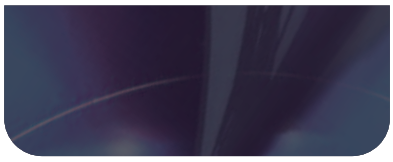

Code No.	Description
DSL227	13 amp unswitched
DSL228	13 amp DP switched
DSL229	13 amp DP switched with neon
DSL230	13 amp DP switched with neon with flex outlet on front plate

45 Amp Cooker Units

DSL231
13 amp switched socket with neons

Features:

- Compliant with BS4177
- Terminals cap able of accepting up to 2x10mm, 1x10mm each conductor

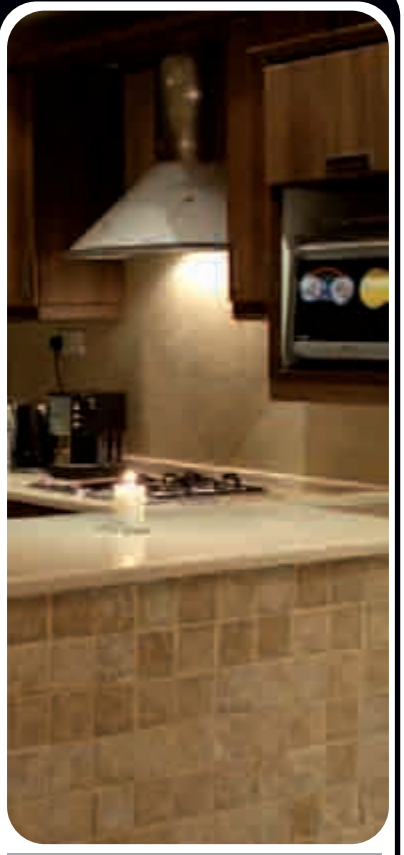

Code No.	Description
DSL231	with 13 amp switched socket with neons

Code No.	Description
DSL232	Dual Voltage- 220/240v 50Hz input -230/115v output

Shaver Supply Unit

DSL232
Dual Voltage- 220/240v 50Hz input
-230/115v output

Features:
- Compliant with BS5733
- CE Marked
- Terminals capable of accepting 3x2.5mm conductors for 20/25 amp

DSL233

DSL235

DSL236



Code No.	Description
DSL233	1 gang TV
DSL234	2 gang TV/FM
DSL235	1 gang satellite
DSL245	2 gang satellite
DSL236	2 gang satellite (1x satellite, 1 x TV/FM)
DSL237	3 gang satellite (1x satellite, 2 x TV/FM)

TV/FM & Satellite Sockets

DSL237
3 gang satellite (1x satellite, 2x TV/FM)

Features:
- Compliant with BS3041 where applicable
- Isolated versions suitable for use with multi-outlet aerial commercial systems
- Suitable for use with VHF/UHF TV &VHF signals

call to order +44 (0)161 745 7777 fax to order +44 (0)161 745 2777 email: sales@selectricuk.co.uk.com website: www.selectricuk.co.uk.com

Communication / Data Sockets

DSL241
2 gang RJ45 (computer/data)

Features:
- Compliant with BABT & BSEN41003 where applicable

DSL238



DSL240

DSL244

Code No.	Description
DSL238	1 gang master telephone socket
DSL239	1 gang secondary telephone socket
DSL240	1 gang RJ45 (computer / data)
DSL241	2 gang RJ45 (computer / data)
DSL244	1 gang RJ11 (american)

Blanking Plates

DSL143
2 gang

Features:
- Compliant with BS5733

DSL142

Code No.	Description
DSL142	1 gang
DSL143	2 gang

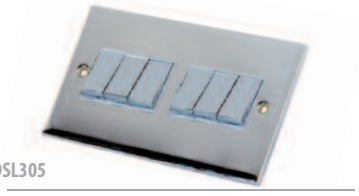
DSL305

DSL306

DSL308

Code No.	Description
DSL301	1 gang 2 way - X-Rated
DSL302	2 gang 2 way - X-Rated
DSL303	3 gang 2 way - X-Rated
DSL304	4 gang 2 way - X-Rated
DSL305	6 gang 2 way - X-Rated
DSL306	Push switch "press" - X-Rated
DSL307	1 gang intermediate - X-Rated
DSL308	3 pole fan isolator - X-Rated

10 amp Plate Switches

DSL303
3 gang 2 way

Features:
- Compliant with BS3676, BSEN60669
- CE Marked
- Each terminal capable of accepting 3x1.5mm
- X-rated for fluorescent or inductive loads

All 10 amp switch modules are interchangeable with any plate product within the range

DSL309

DSL310

DSL314

Code No.	Description
DSL309	1 gang 2 way 400 watt
DSL312	1 gang 2 way 1000 watt
DSL310	2 gang 2 way 400 watt
DSL311	3 gang 2 way 400 watt
DSL314	4 gang 2 way 400 watt

Dimmers Push On / Off- No Derating

DSL311
3 gang 2 way 400 watt

Features:
- Suitable for control of quality dimmable electronic transformers, toroidal transformers and tungsten lamps WITHOUT de-rating
- For use with resistive and inductive loads
- Integrated over-temperature protection fuse
- Smooth dimming operation from 0-100% light output
- Compliant with BSEN60669-2-1 various
- CE Marked
- Fits a plaster depth (25mm) mounting box
- 3 Year Guarantee

20 Amp DP Switches

DSL316
20 amp DP switch with neon

Features:

- Compliant with BS3676, BSEN60669
- CE Marked
- Terminals capable of accepting 3x2.5mm, 4x2.5mm (Earth)
- Optional cable outlet located at bottom edge of faceplate as a knockout
- Cable clamp located on inside of plate capable of accepting 2.5mm flex

DSL315

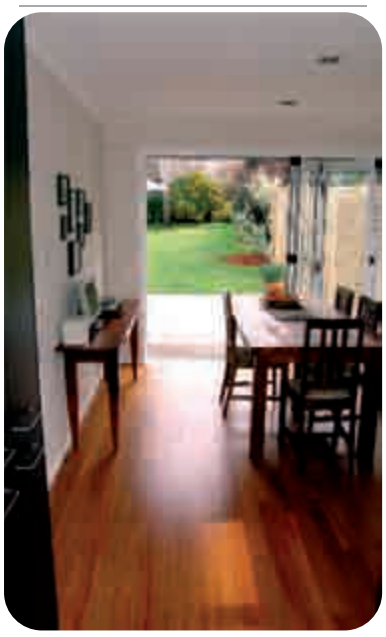

Code No.	Description
DSL315	20 amp DP switch
DSL316	20 amp DP switch with neon

45 Amp DP Switches

DSL318
2 gang plate with neon

Features:

- Compliant with BS3676, BSEN60669
- CE Marked

DSL317

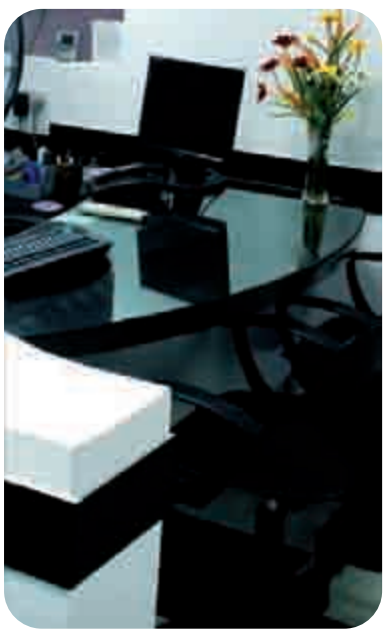

Code No.	Description
DSL317	1 gang plate with neon
DSL318	2 gang plate with neon

DSL319

DSL323

DSL324

Code No.	Description
DSL319	1 gang unswitched
DSL320	2 gang unswitched + 2 earth terminals
DSL321	1 gang switched DP
DSL322	2 gang switched DP+ 2 earth terminals
DSL323	1 gang switched DP with neon
DSL324	2 gang switched DP with neon+ 2 earth terminals

13 Amp Socket Outlets

DSL322
2 gang switched DP
+2 earth Terminals

Features:
- Compliant with BS1363
- Terminals capable of accepting up to 4x2.5mm conductors
- 2 earth terminals for easy installation

DSL326

Code No.	Description
DSL325	2 amp 3 pin
DSL326	5 amp 3 pin

Round Pin Sockets Outlets -with shutters

DSL325
2 amp 3 pin

Features:
- Compliant with BS546

call to order +44 (0)161 745 7777 fax to order +44 (0)161 745 2777 email: sales@selectricuk.co.uk.com website: www.selectricuk.co.uk.com

Fused Connection Units

DSL329
13 amp DP switched with neon

Features:

- Compliant with BS1363 Part 4
- CE Marked
- Terminals capable of accepting 3x2.5mm, 4x2.5mm (Earth) conductors
- Optional cable outlet located at bottom edge of faceplate as a knockout
- Cable clamp located on inside of plate capable of accepting 2.5mm flex



DSL327

DSL328

DSL330

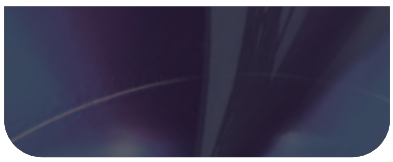

Code No.	Description
DSL327	13 amp unswitched
DSL328	13 amp DP switched
DSL329	13 amp DP switched with neon
DSL330	13 amp DP switched with neon with flex outlet on front plate

45 Amp Cooker Units

DSL331
13 amp switched socket with neons

Features:

- Compliant with BS4177
- Terminals cap able of accepting up to 2x10mm, 1x10mm each conductor

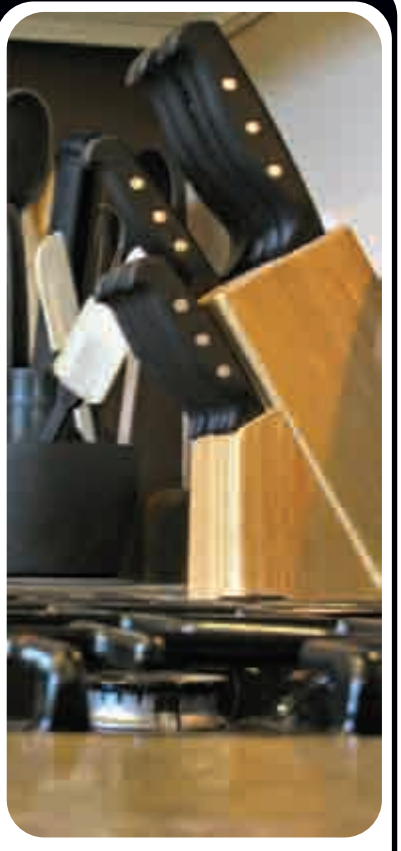

Code No.	Description
DSL331	with 13 amp switched socket with neons

Code No.	Description
DSL332	Dual Voltage- 220/240v 50Hz input -230/115v output

Shaver Supply Unit

DSL332
Dual Voltage- 220/240v 50Hz input -230/115v output

Features:
- Compliant with BS5733
- CE Marked
- Terminals capable of accepting 3x2.5mm conductors for 20/25 amp

DSL333



DSL335

DSL336

Code No.	Description
DSL333	1 gang TV
DSL334	2 gang TV/FM
DSL335	1 gang satellite
DSL345	2 gang satellite
DSL336	2 gang satellite (1x satellite, 1 x TV/FM)
DSL337	3 gang satellite (1x satellite, 2 x TV/FM)

TV/FM & Satellite Sockets

DSL337
3 gang satellite (1x satellite, 2x TV/FM)

Features:
- Compliant with BS3041 where applicable
- Isolated versions suitable for use with multi-outlet aerial commercial systems
- Suitable for use with VHF/UHF TV &VHF signals

call to order +44 (0)161 745 7777 fax to order +44 (0)161 745 2777 email: sales@selectricuk.co.uk.com website: www.selectricuk.co.uk.com

Communication / Data Sockets

DSL341
2 gang RJ45 (computer/data)

Features:
- Compliant with BABT & BSEN41003 where applicable



DSL338

DSL340

DSL344

Code No.	Description
DSL338	1 gang master telephone socket
DSL339	1 gang secondary telephone socket
DSL340	1 gang RJ45 (computer / data)
DSL341	2 gang RJ45 (computer / data)
DSL344	1 gang RJ11 (american)

Blanking Plates

DSL343
2 gang

Features:
- Compliant with BS5733



DSL342

Code No.	Description
DSL342	1 gang
DSL343	2 gang

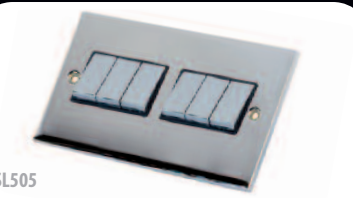
DSL505

DSL506


DSL508

Code No.	Description
DSL501	1 gang 2 way - X-Rated
DSL502	2 gang 2 way - X-Rated
DSL503	3 gang 2 way - X-Rated
DSL504	4 gang 2 way - X-Rated
DSL505	6 gang 2 way - X-Rated
DSL506	Push switch "press" - X-Rated
DSL507	1 gang intermediate - X-Rated
DSL508	3 pole fan isolator - X-Rated

10 amp Plate Switches

DSL503
3 gang 2 way

Features:
- Compliant with BS3676, BSEN60669
- CE Marked
- Each terminal capable of accepting 3x1.5mm
- X-rated for fluorescent or inductive loads

All 10 amp switch modules are interchangeable with any plate product within the range

DSL309

DSL310

DSL314

Code No.	Description
DSL309	1 gang 2 way 400 watt
DSL312	1 gang 2 way 1000 watt
DSL310	2 gang 2 way 400 watt
DSL311	3 gang 2 way 400 watt
DSL314	4 gang 2 way 400 watt

Dimmers Push On / Off- No Derating

DSL311
3 gang 2 way 400 watt

Features:
- Suitable for control of quality dimmable electronic transformers, toroidal transformers and tungsten lamps WITHOUT de-rating
- For use with resistive and inductive loads
- Integrated over-temperature protection fuse
- Smooth dimming operation from 0-100% light output
- Compliant with BSEN60669-2-1 various
- CE Marked
- Fits a plaster depth (25mm) mounting box
- 3 Year Guarantee

20 Amp DP Switches

DSL516
20 amp DP switch with neon

Features:

- Compliant with BS3676, BSEN60669
- CE Marked
- Terminals capable of accepting 3x2.5mm, 4x2.5mm (Earth)
- Optional cable outlet located at bottom edge of faceplate as a knockout
- Cable clamp located on inside of plate capable of accepting 2.5mm flex

DSL515

Code No.	Description
DSL515	20 amp DP switch
DSL516	20 amp DP switch with neon

45 Amp DP Switches

DSL518
2 gang plate with neon

Features:

- Compliant with BS3676, BSEN60669
- CE Marked

DSL517

Code No.	Description
DSL517	1 gang plate with neon
DSL518	2 gang plate with neon

Slim Design Decorative Wiring Accessories with Metal Rockers

DSL519

DSL523

DSL524

Code No.	Description
DSL519	1 gang unswitched
DSL520	2 gang unswitched + 2 earth terminals
DSL521	1 gang switched DP
DSL522	2 gang switched DP+ 2 earth terminals
DSL523	1 gang switched DP with neon
DSL524	2 gang switched DP with neon+ 2 earth terminals

13 Amp Socket Outlets

DSL522

2 gang switched DP
+2 earth Terminals

Features:

- Compliant with BS1363
- Terminals capable of accepting up to 4x2.5mm conductors
- 2 earth terminals for easy installation

DSL526

Code No.	Description
DSL525	2 amp 3 pin
DSL526	5 amp 3 pin

Round Pin Sockets Outlets -with shutters

DSL525

2 amp 3 pin

Features:

- Compliant with BS546

Fused Connection Units

DSL529
13 amp DP switched with neon

Features:

- Compliant with BS1363 Part 4
- CE Marked
- Terminals capable of accepting 3x2.5mm, 4x2.5mm (Earth) conductors
- Optional cable outlet located at bottom edge of faceplate as a knockout
- Cable clamp located on inside of plate capable of accepting 2.5mm flex

DSL527

DSL528

DSL530

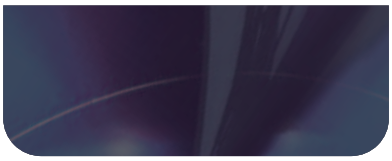

Code No.	Description
DSL527	13 amp unswitched
DSL528	13 amp DP switched
DSL529	13 amp DP switched with neon
DSL530	13 amp DP switched with neon with flex outlet on front plate

45 Amp Cooker Units

DSL531
13 amp switched socket with neons

Features:

- Compliant with BS4177
- Terminals cap able of accepting up to 2x10mm, 1x10mm each conductor

Code No.	Description
DSL531	with 13 amp switched socket with neons

Code No.	Description
DSL532	Dual Voltage- 220/240v 50Hz input -230/115v output

Shaver Supply Unit

DSL532
Dual Voltage- 220/240v 50Hz input
-230/115v output

Features:
- Compliant with BS5733
- CE Marked
- Terminals capable of accepting 3x2.5mm conductors for 20/25 amp

TV/FM & Satellite Sockets

DSL533

DSL535

DSL536

Code No.	Description
DSL533	1 gang TV
DSL534	2 gang TV/FM
DSL535	1 gang satellite
DSL545	2 gang satellite
DSL536	2 gang satellite (1x satellite, 1 x TV/FM)
DSL537	3 gang satellite (1x satellite, 2 x TV/FM)

DSL537
3 gang satellite (1x satellite, 2x TV/FM)

Features:
- Compliant with BS3041 where applicable
- Isolated versions suitable for use with multi-outlet aerial commercial systems
- Suitable for use with VHF/UHF TV &VHF signals

call to order +44 (0)161 745 7777 fax to order +44 (0)161 745 2777 email: sales@selectricuk.co.uk.com website: www.selectricuk.co.uk.com

Communication / Data Sockets

DSL541
2 gang RJ45 (computer/data)

Features:
- Compliant with BABT & BSEN41003 where applicable

DSL538

DSL540

DSL544

Code No.	Description
DSL538	1 gang master telephone socket
DSL539	1 gang secondary telephone socket
DSL540	1 gang RJ45 (computer / data)
DSL541	2 gang RJ45 (computer / data)
DSL544	1 gang RJ11 (american)

Blanking Plates

DSL343
2 gang

Features:
- Compliant with BS5733



DSL342

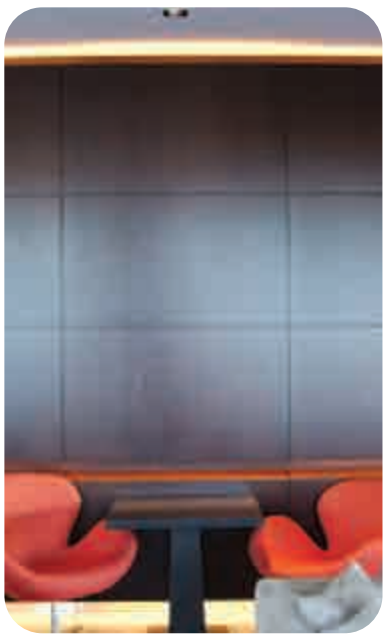

Code No.	Description
DSL342	1 gang
DSL343	2 gang

DSL405

DSL406

DSL408

Code No.	Description
DSL401	1 gang 2 way - X-Rated
DSL402	2 gang 2 way - X-Rated
DSL403	3 gang 2 way - X-Rated
DSL404	4 gang 2 way - X-Rated
DSL405	6 gang 2 way - X-Rated
DSL406	Push switch "press" - X-Rated
DSL407	1 gang intermediate - X-Rated
DSL408	3 pole fan isolator - X-Rated

10 amp Plate Switches

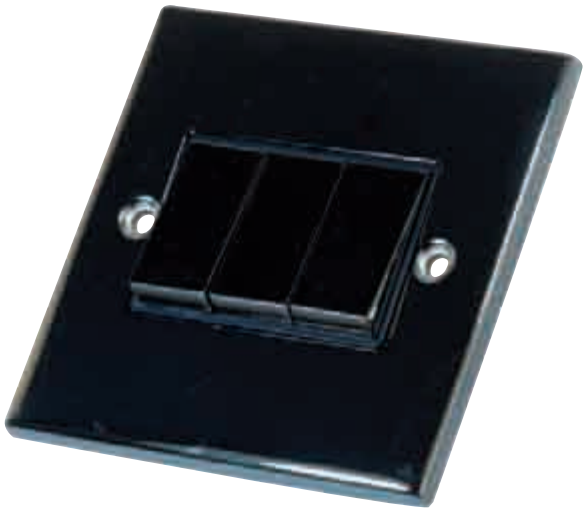

DSL403
3 gang 2 way

Features:
- Compliant with BS3676, BSEN60669
- CE Marked
- Each terminal capable of accepting 3x1.5mm
- X-rated for fluorescent or inductive loads

All 10 amp switch modules are interchangeable with any plate product within the range

DSL409

DSL410

DSL414

Code No.	Description
DSL409	1 gang 2 way 400 watt
DSL412	1 gang 2 way 1000 watt
DSL410	2 gang 2 way 400 watt
DSL411	3 gang 2 way 400 watt
DSL414	4 gang 2 way 400 watt

Dimmers Push On / Off- No Derating

DSL411
3 gang 2 way 400 watt

Features:
- Suitable for control of quality dimmable electronic transformers, toroidal transformers and tungsten lamps WITHOUT de-rating
- For use with resistive and inductive loads
- Integrated over-temperature protection fuse
- Smooth dimming operation from 0-100% light output
- Compliant with BSEN60669-2-1 various
- CE Marked
- Fits a plaster depth (25mm) mounting box
- 3 Year Guarantee

20 Amp DP Switches

DSL416
20 amp DP switch with neon

Features:

- Compliant with BS3676, BSEN60669
- CE Marked
- Terminals capable of accepting 3x2.5mm, 4x2.5mm (Earth)
- Optional cable outlet located at bottom edge of faceplate as a knockout
- Cable clamp located on inside of plate capable of accepting 2.5mm flex

DSL415

Code No.	Description
DSL415	20 amp DP switch
DSL416	20 amp DP switch with neon

45 Amp DP Switches

DSL418
2 gang plate with neon

Features:

- Compliant with BS3676, BSEN60669
- CE Marked

DSL417

Code No.	Description
DSL417	1 gang plate with neon
DSL418	2 gang plate with neon

DSL419

DSL423

DSL424

Code No.	Description
DSL419	1 gang unswitched
DSL420	2 gang unswitched + 2 earth terminals
DSL421	1 gang switched DP
DSL422	2 gang switched DP+ 2 earth terminals
DSL423	1 gang switched DP with neon
DSL424	2 gang switched DP with neon+ 2 earth terminals

13 Amp Socket Outlets

DSL422
2 gang switched DP
+2 earth Terminals

Features:
- Compliant with BS1363
- Terminals capable of accepting up to 4x2.5mm conductors
- 2 earth terminals for easy installation

DSL426

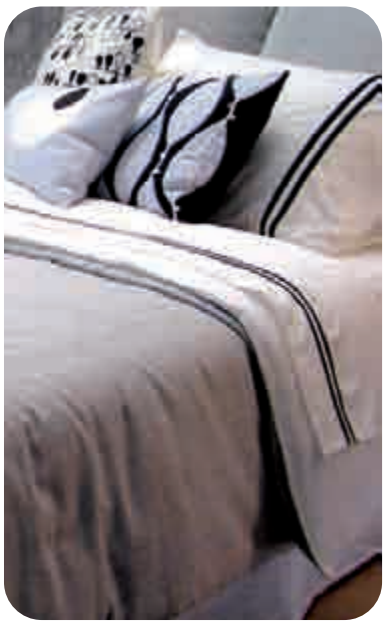

Code No.	Description
DSL425	2 amp 3 pin
DSL426	5 amp 3 pin

Round Pin Sockets Outlets -with shutters

DSL425
2 amp 3 pin

Features:
- Compliant with BS546

call to order +44 (0)161 745 7777 fax to order +44 (0)161 745 2777 email: sales@selectricuk.co.uk.com website: www.selectricuk.co.uk.com

Fused Connection Units

DSL429
13 amp DP switched with neon

Features:

- Compliant with BS1363 Part 4
- CE Marked
- Terminals capable of accepting 3x2.5mm, 4x2.5mm (Earth) conductors
- Optional cable outlet located at bottom edge of faceplate as a knockout
- Cable clamp located on inside of plate capable of accepting 2.5mm flex

DSL427



DSL428

DSL430

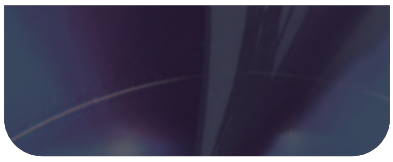

Code No.	Description
DSL427	13 amp unswitched
DSL428	13 amp DP switched
DSL429	13 amp DP switched with neon
DSL430	13 amp DP switched with neon with flex outlet on front plate

45 Amp Cooker Units

DSL431
13 amp switched socket with neons

Features:

- Compliant with BS4177
- Terminals cap able of accepting up to 2x10mm, 1x10mm each conductor

Code No.	Description
DSL431	with 13 amp switched socket with neons

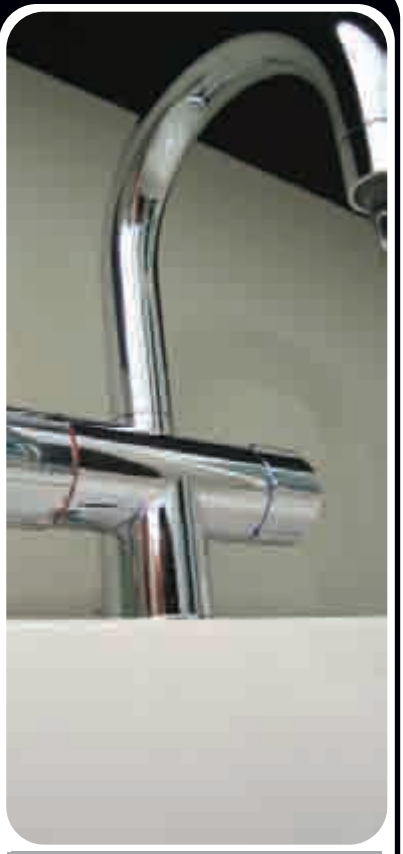

Code No.	Description
DSL432	Dual Voltage- 220/240v 50Hz input -230/115v output

Shaver Supply Unit

DSL432

Dual Voltage- 220/240v 50Hz input -230/115v output

Features:

- Compliant with BS5733
- CE Marked
- Terminals capable of accepting 3x2.5mm conductors for 20/25 amp

DSL433

DSL435

DSL436

Code No.	Description
DSL433	1 gang TV
DSL434	2 gang TV/FM
DSL435	1 gang satellite
DSL445	2 gang satellite
DSL436	2 gang satellite (1x satellite, 1 x TV/FM)
DSL437	3 gang satellite (1x satellite, 2 x TV/FM)

TV/FM & Satellite Sockets

DSL437

3 gang satellite (1x satellite, 2x TV/FM)

Features:

- Compliant with BS3041 where applicable
- Isolated versions suitable for use with multi-outlet aerial commercial systems
- Suitable for use with VHF/UHF TV &VHF signals

Communication / Data Sockets

DSL441
2 gang RJ45 (computer/data)

Features:
- Compliant with BABT & BSEN41003 where applicable

DSL438

DSL440

DSL444

Code No.	Description
DSL438	1 gang master telephone socket
DSL439	1 gang secondary telephone socket
DSL440	1 gang RJ45 (computer / data)
DSL441	2 gang RJ45 (computer / data)
DSL444	1 gang RJ11 (american)

Blanking Plates

DSL443
2 gang

Features:
- Compliant with BS5733

DSL442

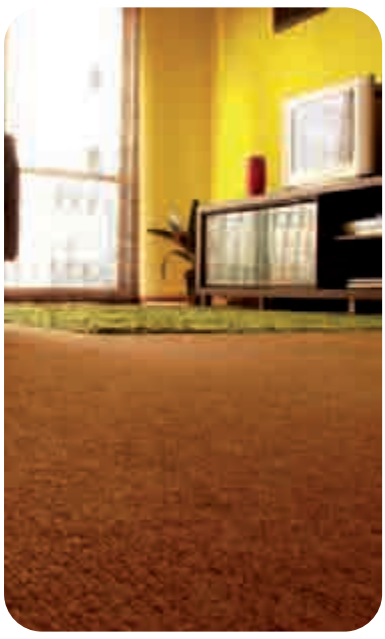

Code No.	Description
DSL442	1 gang
DSL443	2 gang

DSL605


DSL606


DSL608



Code No.	Description
DSL601	1 gang 2 way - X-Rated
DSL602	2 gang 2 way - X-Rated
DSL603	3 gang 2 way - X-Rated
DSL604	4 gang 2 way - X-Rated
DSL605	6 gang 2 way - X-Rated
DSL606	Push switch "press" - X-Rated
DSL607	1 gang intermediate - X-Rated
DSL608	3 pole fan isolator - X-Rated

10 amp Plate Switches

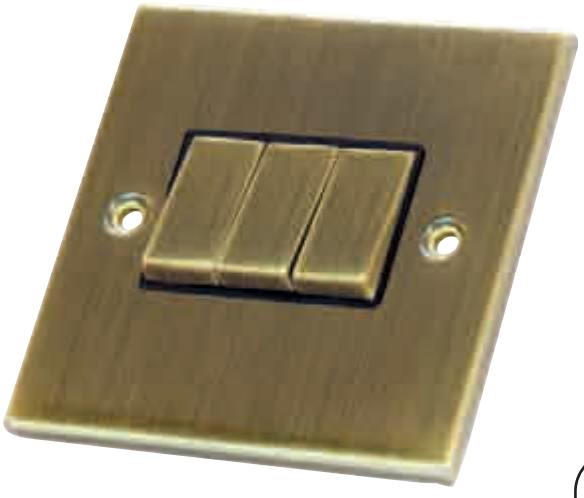

DSL603
3 gang 2 way

All 10 amp switch modules are interchangeable with any plate product within the range

Features:
- Compliant with BS3676, BSEN60669
- CE Marked
- Each terminal capable of accepting 3x1.5mm
- X-rated for fluorescent or inductive loads


DSL609


DSL610

DSL614

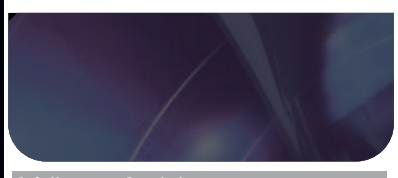

Code No.	Description
DSL609	1 gang 2 way 400 watt
DSL612	1 gang 2 way 1000 watt
DSL610	2 gang 2 way 400 watt
DSL611	3 gang 2 way 400 watt
DSL614	4 gang 2 way 400 watt

Dimmers Push On / Off- No Derating

DSL611
3 gang 2 way 400 watt

Features:
- Suitable for control of quality dimmable electronic transformers, toroidal transformers and tungsten lamps WITHOUT de-rating
- For use with resistive and inductive loads
- Integrated over-temperature protection fuse
- Smooth dimming operation from 0-100% light output
- Compliant with BSEN60669-2-1 various
- CE Marked
- Fits a plaster depth (25mm) mounting box
- 3 Year Guarantee

20 Amp DP Switches

DSL616
20 amp DP switch with neon

Features:

- Compliant with BS3676, BSEN60669
- CE Marked
- Terminals capable of accepting 3x2.5mm, 4x2.5mm (Earth)
- Optional cable outlet located at bottom edge of faceplate as a knockout
- Cable clamp located on inside of plate capable of accepting 2.5mm flex



DSL615

Code No.	Description
DSL615	20 amp DP switch
DSL616	20 amp DP switch with neon

45 Amp DP Switches

DSL618
2 gang plate with neon

Features:

- Compliant with BS3676, BSEN60669
- CE Marked

DSL617

Code No.	Description
DSL617	1 gang plate with neon
DSL618	2 gang plate with neon



DSL619

DSL623

DSL624

Code No.	Description
DSL619	1 gang unswitched
DSL620	2 gang unswitched + 2 earth terminals
DSL621	1 gang switched DP
DSL622	2 gang switched DP+ 2 earth terminals
DSL623	1 gang switched DP with neon
DSL624	2 gang switched DP with neon+ 2 earth terminals

13 Amp Socket Outlets

DSL622

2 gang switched DP
+2 earth Terminals

Features:

- Compliant with BS1363
- Terminals capable of accepting up to 4x2.5mm conductors
- 2 earth terminals for easy installation



DSL626

Code No.	Description
DSL625	2 amp 3 pin
DSL626	5 amp 3 pin

Round Pin Sockets Outlets -with shutters

DSL625

2 amp 3 pin

Features:

- Compliant with BS546

Fused Connection Units

DSL629

13 amp DP switched with neon

Features:

- Compliant with BS1363 Part 4
- CE Marked
- Terminals capable of accepting 3x2.5mm, 4x2.5mm (Earth) conductors
- Optional cable outlet located at bottom edge of faceplate as a knockout
- Cable clamp located on inside of plate capable of accepting 2.5mm flex

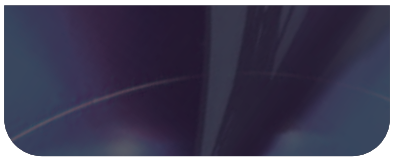

Code No.	Description
DSL627	13 amp unswitched
DSL628	13 amp DP switched
DSL629	13 amp DP switched with neon
DSL630	13 amp DP switched with neon with flex outlet on front plate

45 Amp Cooker Units

DSL631

13 amp switched socket with neons

Features:

- Compliant with BS4177
- Terminals cap able of accepting up to 2x10mm, 1x10mm each conductor

Code No.	Description
DSL631	with 13 amp switched socket with neons

Code No.	Description
DSL632	Dual Voltage- 220/240v 50Hz input -230/115v output

Shaver Supply Unit

DSL632
Dual Voltage- 220/240v 50Hz input
-230/115v output

Features:
- Compliant with BS5733
- CE Marked
- Terminals capable of accepting 3x2.5mm conductors for 20/25 amp



DSL633



DSL635



DSL636



Code No.	Description
DSL633	1 gang TV
DSL634	2 gang TV/FM
DSL635	1 gang satellite
DSL645	2 gang satellite
DSL636	2 gang satellite (1x satellite, 1 x TV/FM)
DSL637	3 gang satellite (1x satellite, 2 x TV/FM)

TV/FM & Satellite Sockets

DSL637
3 gang satellite (1x satellite, 2x TV/FM)

Features:
- Compliant with BS3041 where applicable
- Isolated versions suitable for use with multi-outlet aerial commercial systems
- Suitable for use with VHF/UHF TV &VHF signals

Communication / Data Sockets

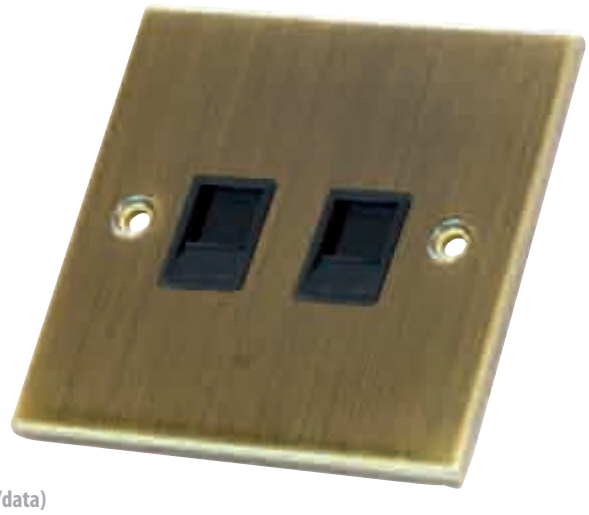

DSL641
2 gang RJ45 (computer/data)

Features:
- Compliant with BABT & BSEN41003 where applicable



DSL638



DSL640



DSL644

Code No.	Description
DSL638	1 gang master telephone socket
DSL639	1 gang secondary telephone socket
DSL640	1 gang RJ45 (computer / data)
DSL641	2 gang RJ45 (computer / data)
DSL644	1 gang RJ11 (american)

Blanking Plates

DSL643
2 gang

Features:
- Compliant with BS5733



DSL642

Code No.	Description
DSL642	1 gang
DSL643	2 gang

DSL705



DSL706



DSL708

Code No.	Description
DSL701	1 gang 2 way - X-Rated
DSL702	2 gang 2 way - X-Rated
DSL703	3 gang 2 way - X-Rated
DSL704	4 gang 2 way - X-Rated
DSL705	6 gang 2 way - X-Rated
DSL706	Push switch "press" - X-Rated
DSL707	1 gang intermediate - X-Rated
DSL708	3 pole fan isolator - X-Rated

10 amp Plate Switches

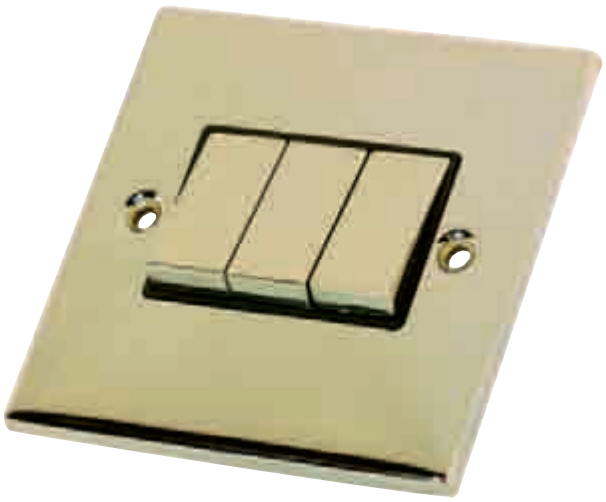

DSL703

3 gang 2 way

Features:

- Compliant with BS3676, BSEN60669
- CE Marked
- Each terminal capable of accepting 3x1.5mm
- X-rated for fluorescent or inductive loads

All 10 amp switch modules are interchangeable with any plate product within the range

DSL709

DSL710

DSL714

Code No.	Description
DSL709	1 gang 2 way 400 watt
DSL712	1 gang 2 way 1000 watt
DSL710	2 gang 2 way 400 watt
DSL711	3 gang 2 way 400 watt
DSL714	4 gang 2 way 400 watt

Dimmers Push On / Off- No Derating

DSL711

3 gang 2 way 400 watt

Features:

- Suitable for control of quality dimmable electronic transformers, toroidal transformers and tungsten lamps WITHOUT de-rating
- For use with resistive and inductive loads
- Integrated over-temperature protection fuse
- Smooth dimming operation from 0-100% light output
- Compliant with BSEN60669-2-1 various
- CE Marked
- Fits a plaster depth (25mm) mounting box
- 3 Year Guarantee

20 Amp DP Switches

DSL716
20 amp DP switch with neon

Features:

- Compliant with BS3676, BSEN60669
- CE Marked
- Terminals capable of accepting 3x2.5mm, 4x2.5mm (Earth)
- Optional cable outlet located at bottom edge of faceplate as a knockout
- Cable clamp located on inside of plate capable of accepting 2.5mm flex



DSL715

Code No.	Description
DSL715	20 amp DP switch
DSL716	20 amp DP switch with neon

45 Amp DP Switches

DSL718
2 gang plate with neon

Features:

- Compliant with BS3676, BSEN60669
- CE Marked

DSL717

Code No.	Description
DSL717	1 gang plate with neon
DSL718	2 gang plate with neon



DSL719

DSL723

DSL724

Code No.	Description
DSL719	1 gang unswitched
DSL720	2 gang unswitched + 2 earth terminals
DSL721	1 gang switched DP
DSL722	2 gang switched DP+ 2 earth terminals
DSL723	1 gang switched DP with neon
DSL724	2 gang switched DP with neon+ 2 earth terminals

13 Amp Socket Outlets

DSL722
2 gang switched DP
+2 earth Terminals

Features:
- Compliant with BS1363
- Terminals capable of accepting up to 4x2.5mm conductors
- 2 earth terminals for easy installation



DSL726

Code No.	Description
DSL725	2 amp 3 pin
DSL726	5 amp 3 pin

Round Pin Sockets Outlets -with shutters

DSL725
2 amp 3 pin

Features:
- Compliant with BS546

call to order +44 (0)161 745 7777 fax to order +44 (0)161 745 2777 email: sales@selectricuk.co.uk.com website: www.selectricuk.co.uk.com

Fused Connection Units

DSL729
13 amp DP switched with neon

Features:

- Compliant with BS1363 Part 4
- CE Marked
- Terminals capable of accepting 3x2.5mm, 4x2.5mm (Earth) conductors
- Optional cable outlet located at bottom edge of faceplate as a knockout
- Cable clamp located on inside of plate capable of accepting 2.5mm flex



DSL727

DSL728

DSL730

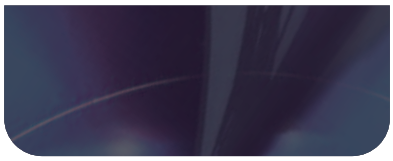

Code No.	Description
DSL727	13 amp unswitched
DSL728	13 amp DP switched
DSL729	13 amp DP switched with neon
DSL730	13 amp DP switched with neon with flex outlet on front plate

45 Amp Cooker Units

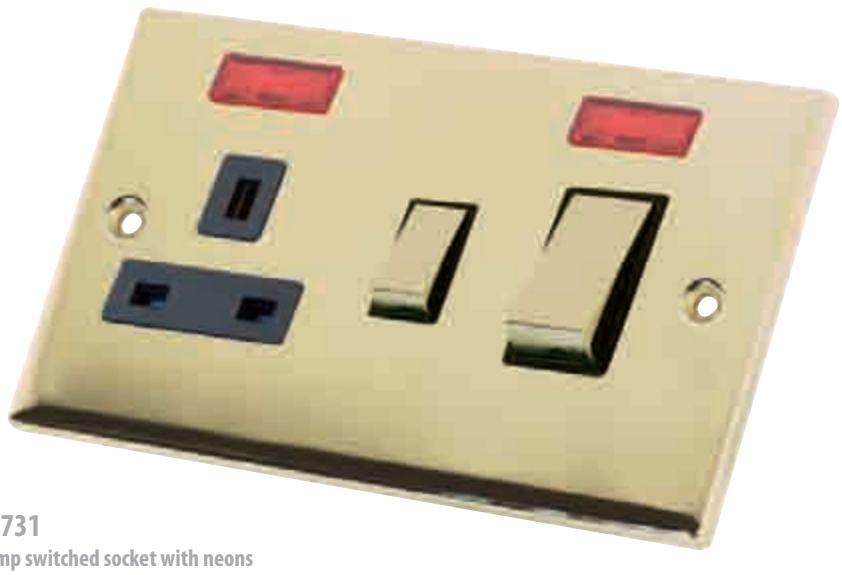

DSL731
13 amp switched socket with neons

Features:

- Compliant with BS4177
- Terminals cap able of accepting up to 2x10mm, 1x10mm each conductor

Code No.	Description
DSL731	with 13 amp switched socket with neons

Code No.	Description
DSL732	Dual Voltage- 220/240v 50Hz input -230/115v output

Shaver Supply Unit

DSL732
Dual Voltage- 220/240v
50Hz input -230/115v
output

Features:
- Compliant with BS5733
- CE Marked
- Terminals capable of accepting 3x2.5mm conductors for 20/25 amp

TV/FM & Satellite Sockets


DSL733


DSL735


DSL736

Code No.	Description
DSL733	1 gang TV
DSL734	2 gang TV/FM
DSL735	1 gang satellite
DSL745	2 gang satellite
DSL736	2 gang satellite (1x satellite, 1 x TV/FM)
DSL737	3 gang satellite (1x satellite, 2 x TV/FM)

DSL737
3 gang satellite (1x satellite, 2x TV/FM)

Features:
- Compliant with BS3041 where applicable
- Isolated versions suitable for use with multi-outlet aerial commercial systems
- Suitable for use with VHF/UHF TV &VHF signals

Communication / Data Sockets

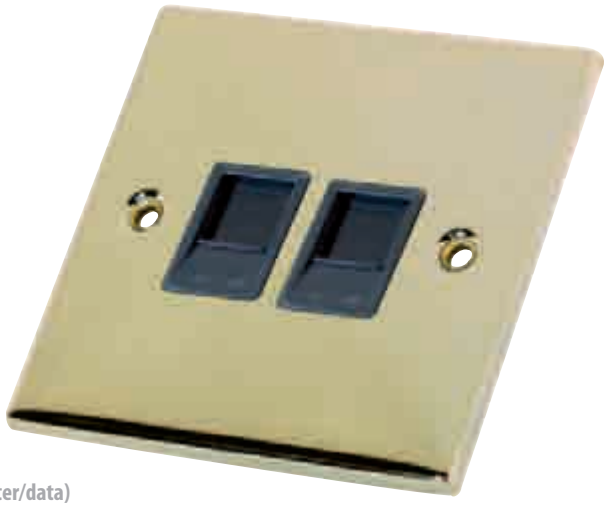

DSL741
2 gang RJ45 (computer/data)

Features:
- Compliant with BABT & BSEN41003 where applicable



DSL738



DSL740



DSL744

Code No.	Description
DSL738	1 gang master telephone socket
DSL739	1 gang secondary telephone socket
DSL740	1 gang RJ45 (computer / data)
DSL741	2 gang RJ45 (computer / data)
DSL744	1 gang RJ11 (american)

Blanking Plates

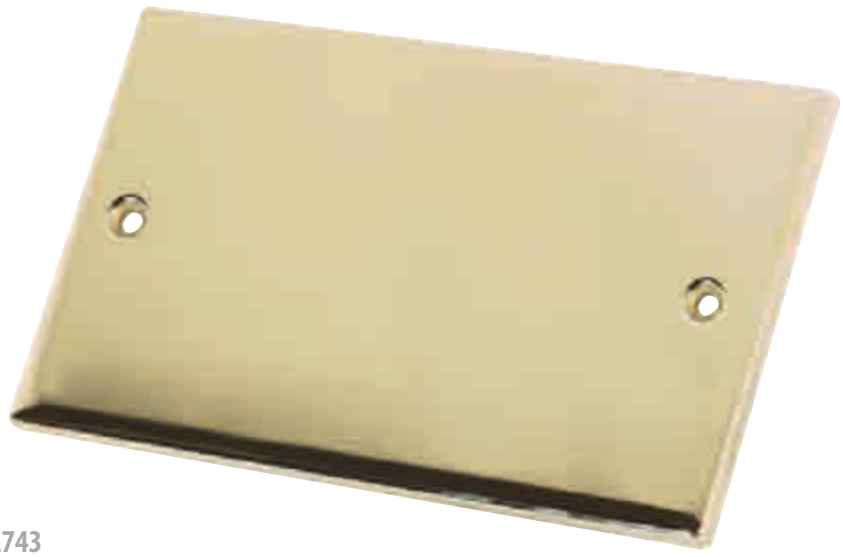

DSL743
2 gang

Features:
- Compliant with BS5733

DSL742

Code No.	Description
DSL742	1 gang
DSL743	2 gang

DSL805



DSL806



DSL808

Code No.	Description
DSL801	1 gang 2 way - X-Rated
DSL802	2 gang 2 way - X-Rated
DSL803	3 gang 2 way - X-Rated
DSL804	4 gang 2 way - X-Rated
DSL805	6 gang 2 way - X-Rated
DSL806	Push switch "press" - X-Rated
DSL807	1 gang intermediate - X-Rated
DSL808	3 pole fan isolator - X-Rated

10 amp Plate Switches

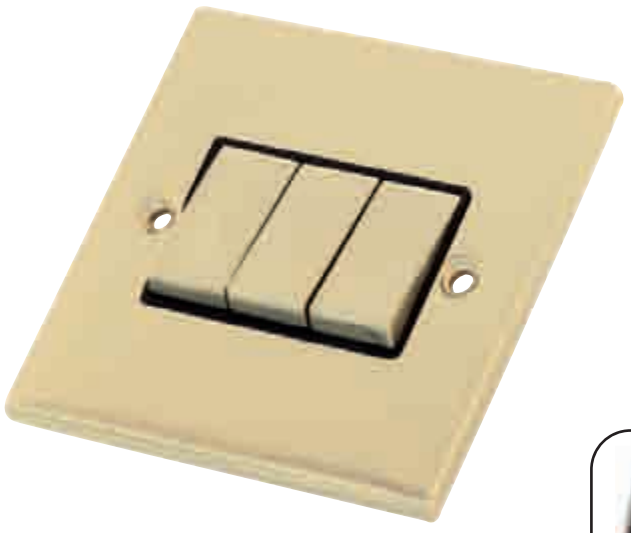

DSL803

3 gang 2 way

Features:

- Compliant with BS3676, BSEN60669
- CE Marked
- Each terminal capable of accepting 3x1.5mm
- X-rated for fluorescent or inductive loads

All 10 amp switch modules are interchangeable with any plate product within the range

DSL809



DSL810



DSL814

Code No.	Description
DSL809	1 gang 2 way 400 watt
DSL812	1 gang 2 way 1000 watt
DSL810	2 gang 2 way 400 watt
DSL811	3 gang 2 way 400 watt
DSL814	4 gang 2 way 400 watt

Dimmers Push On / Off- No Derating

DSL811

3 gang 2 way 400 watt

Features:

- Suitable for control of quality dimmable electronic transformers, toroidal transformers and tungsten lamps WITHOUT de-rating
- For use with resistive and inductive loads
- Integrated over-temperature protection fuse
- Smooth dimming operation from 0-100% light output
- Compliant with BSEN60669-2-1 various
- CE Marked
- Fits a plaster depth (25mm) mounting box
- 3 Year Guarantee

20 Amp DP Switches

DSL816
20 amp DP switch with neon

Features:

- Compliant with BS3676, BSEN60669
- CE Marked
- Terminals capable of accepting 3x2.5mm, 4x2.5mm (Earth)
- Optional cable outlet located at bottom edge of faceplate as a knockout
- Cable clamp located on inside of plate capable of accepting 2.5mm flex



DSL815

Code No.	Description
DSL815	20 amp DP switch
DSL816	20 amp DP switch with neon

45 Amp DP Switches

DSL818
2 gang plate with neon

Features:

- Compliant with BS3676, BSEN60669
- CE Marked

DSL817

Code No.	Description
DSL817	1 gang plate with neon
DSL818	2 gang plate with neon



DSL819



DSL823



DSL824

Code No.	Description
DSL819	1 gang unswitched
DSL820	2 gang unswitched + 2 earth terminals
DSL821	1 gang switched DP
DSL822	2 gang switched DP+ 2 earth terminals
DSL823	1 gang switched DP with neon
DSL824	2 gang switched DP with neon+ 2 earth terminals

13 Amp Socket Outlets

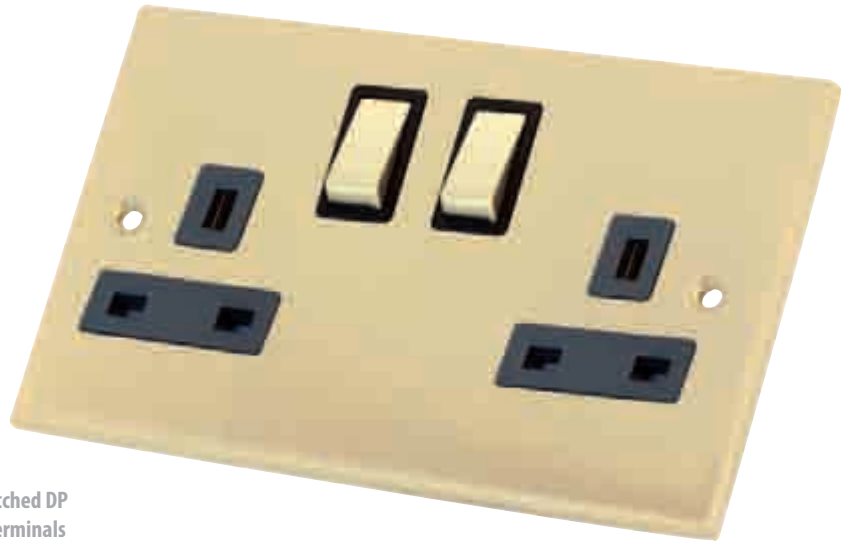

DSL822
2 gang switched DP
+2 earth Terminals

Features:
- Compliant with BS1363
- Terminals capable of accepting up to 4x2.5mm conductors
- 2 earth terminals for easy installation



DSL826

Code No.	Description
DSL825	2 amp 3 pin
DSL826	5 amp 3 pin

Round Pin Sockets Outlets -with shutters

DSL825
2 amp 3 pin

Features:
- Compliant with BS546

Fused Connection Units

DSL829
13 amp DP switched with neon

Features:

- Compliant with BS1363 Part 4
- CE Marked
- Terminals capable of accepting 3x2.5mm, 4x2.5mm (Earth) conductors
- Optional cable outlet located at bottom edge of faceplate as a knockout
- Cable clamp located on inside of plate capable of accepting 2.5mm flex



DSL827



DSL828

DSL830

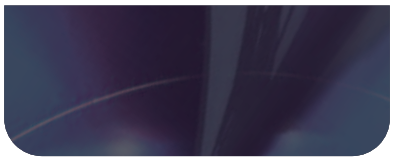

Code No.	Description
DSL827	13 amp unswitched
DSL828	13 amp DP switched
DSL829	13 amp DP switched with neon
DSL830	13 amp DP switched with neon with flex outlet on front plate

45 Amp Cooker Units

DSL831
13 amp switched socket with neons

Features:

- Compliant with BS4177
- Terminals cap able of accepting up to 2x10mm, 1x10mm each conductor

Code No.	Description
DSL831	with 13 amp switched socket with neons

Code No.	Description
DSL832	Dual Voltage- 220/240v 50Hz input -230/115v output

Shaver Supply Unit

DSL832
Dual Voltage- 220/240v 50Hz input
-230/115v output

Features:
- Compliant with BS5733
- CE Marked
- Terminals capable of accepting 3x2.5mm conductors for 20/25 amp



DSL833



DSL835



DSL836

Code No.	Description
DSL833	1 gang TV
DSL834	2 gang TV/FM
DSL835	1 gang satellite
DSL845	2 gang satellite
DSL836	2 gang satellite (1x satellite, 1 x TV/FM)
DSL837	3 gang satellite (1x satellite, 2 x TV/FM)

TV/FM & Satellite Sockets

DSL837
3 gang satellite (1x satellite, 2x TV/FM)

Features:
- Compliant with BS3041 where applicable
- Isolated versions suitable for use with multi-outlet aerial commercial systems
- Suitable for use with VHF/UHF TV &VHF signals

Communication / Data Sockets

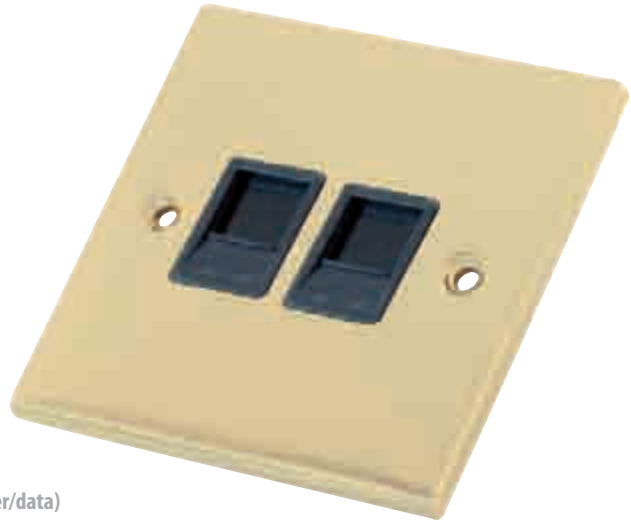

DSL841
2 gang RJ45 (computer/data)

Features:
• Compliant with BABT & BSEN41003 where applicable



DSL838



DSL840



DSL844

Code No.	Description
DSL838	1 gang master telephone socket
DSL839	1 gang secondary telephone socket
DSL840	1 gang RJ45 (computer / data)
DSL841	2 gang RJ45 (computer / data)
DSL844	1 gang RJ11 (american)

Blanking Plates

DSL843
2 gang

Features:
• Compliant with BS5733



DSL842

Code No.	Description
DSL842	1 gang
DSL843	2 gang